


CONTROLS




CLEVER PRO (Optional) ADVANCED PRO (Standard)

COM1 and COM2 are the same type of port. Control and air curtain cables can be connected to either COM1 or COM2.




4 PINS CONNECTOR RJ11

Are used for the connection to the control and also to the slaves air curtains connected





POWER SUPPLY CONNECTION BOX



220-240V 50/60HZ

INTERNAL CONNECTIONS (open grille)

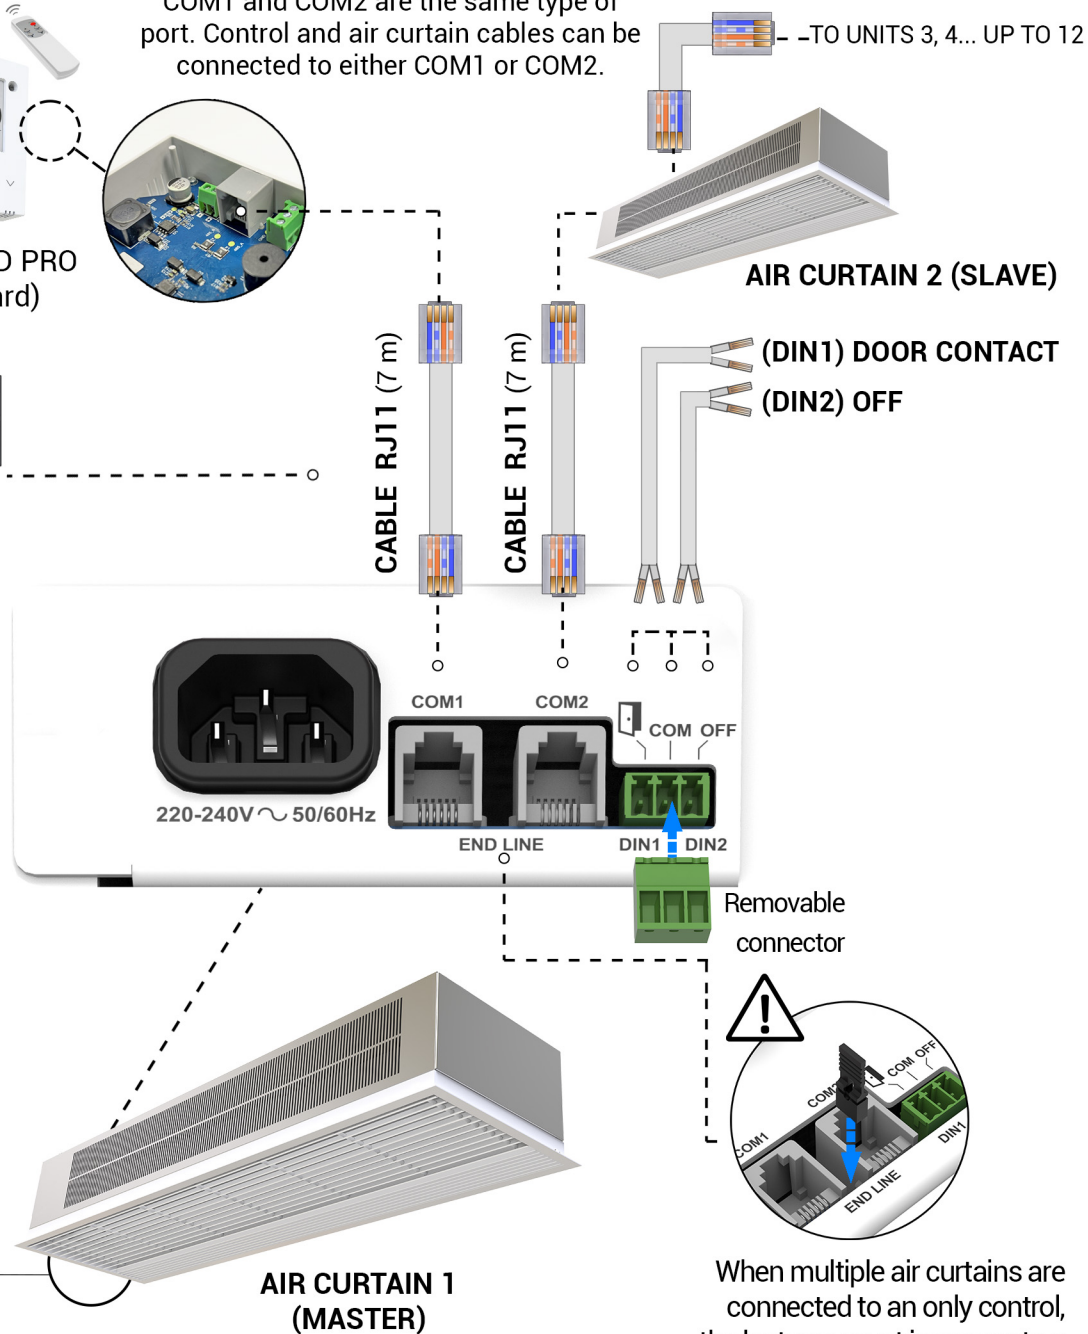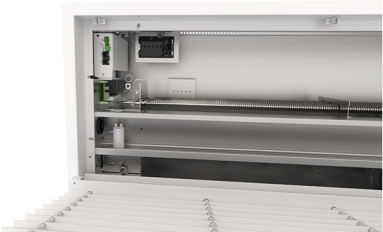

When multiple air curtains are connected to an only control, the last one must incorporate a Jumper in "END LINE" pins.

JUMPER CONNECTORS:

Unheated Model:
No Jumpers
No Valves
(default)





Water Heated Models:
ON/OFF
WATER MODE Jumper
(default)

Proportional
WATER MODE and AUX Jumpers



OPTIONAL VALVES:

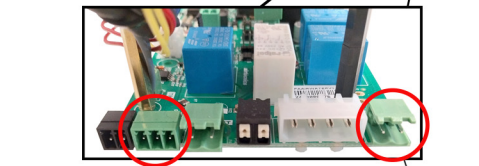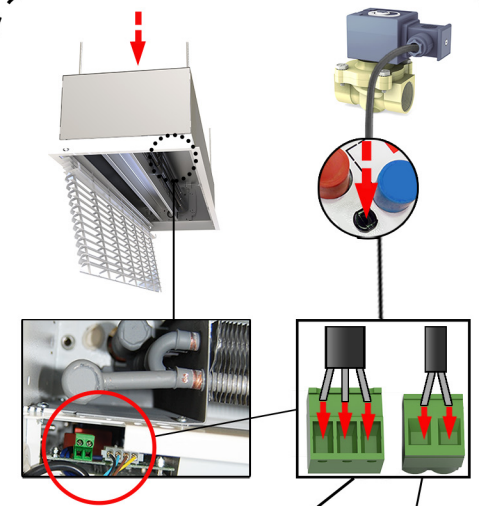

Proportional Valve
0-10V/GND/24VDC



ON/OFF Valve
220-240Vx1

